

LUMAIRE Magnetic

In the development of Lumaire Magnetic LED panel the most important goal was – practicality. Our Magnetic frame system is useful when easy print swapping is required. With the help of suction cup the protective acrylic sheet can be lifted, so it takes less than a minute to change the visual.


- Thickness is just 15mm (single or double-sided)
- Brightness up to 11000lx on the surface depending on size
- Single or double sided, curved
- Low power consumption
- Wide application possibilities, from interior design to signage



TECHNICAL SPECIFICATIONS

Manufacturer	Leddex
Product name	Lumaire Magnetic
Main material	Clear acrylic (PMMA)
Thickness	15 mm (single or double-sided)
Luminous efficiency	up to 160lm/W
Colour temperature	3000K 4000K 5000K 6500 K
IP rating	IP 40
Maximum size	2450x1250 mm
Lifetime	> 50,000 hours
Warranty	3years
Operating temperature	-30°C ~ + 40°C
Power supply	AC / DC 12V / 24V / CC Adaptor
Working voltage	DC 12V / DC 24V / DC CC
Input voltage	AC 100 ~ 240V 50/60Hz

VISUAL APPEARANCE

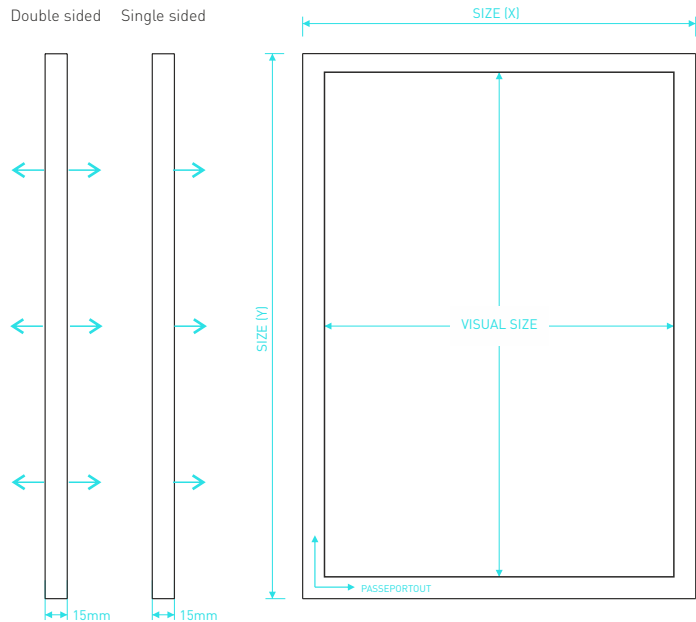

EASY PRINT CHANGE



Poster size	Visible size	External size X x Y
700x500	674x478	728x532
1000x700	974x678	1028x732
A4 297x210	271x188	325x242
A3 420x297	394x275	448x329
A2 594x420	568x398	622x452
A1 841x594	815x572	869x626
A0 1193x841	1163x819	1217x873
Max size 2450x1250	2424x1228	2478x1282

PACKAGE INCLUDES

- 1x Power supply
- 1x Suction cup

+ OPTIONAL ACCESSORIES

- Cable installation kit

MAGNETIC PANEL CUSTOMIZATION OPTIONS

Frame colors

- Anodized silver
- Anodized black
- Custom RAL

Passepartout colours

- White
- Black
- Any color