
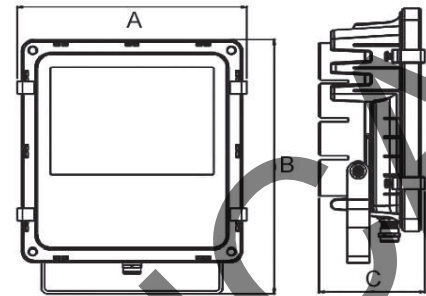


Ficha técnica Familia Proyectores Exteriores Standard

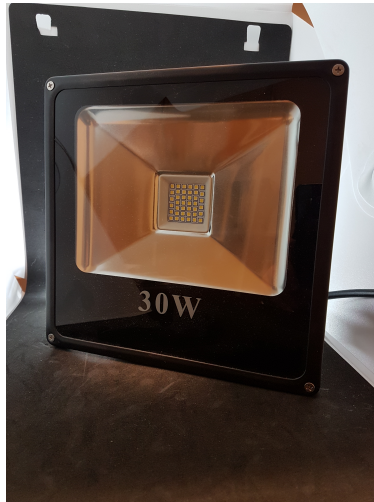


| | 10w | 20w | 30w | 50w |
|---|--------|--------|--------|--------|
| A | 118 mm | 185 mm | 220 mm | 275 mm |
| B | 147 mm | 180 mm | 228 mm | 285 mm |
| C | 40 mm | 43 mm | 52 mm | 70 mm |

Características técnicas


| Modelo | Voltaje | Potencia (w) | Lúmenes (Lm) | CRI (Ra) | PF | LED Chip | Ángulo apertura |
|--------|-------------|--------------|--------------|----------|---------|----------|-----------------|
| F50W | AC85 ~ 265v | 50w | 4500 Lm | Ra>75 | PF>0.95 | Epistar | 120º |
| F30W | AC85 ~ 265v | 30w | 2700 Lm | Ra>75 | PF>0.95 | Epistar | 120º |
| F20W | AC85 ~ 265v | 20w | 1700 Lm | Ra>75 | PF>0.95 | Epistar | 120º |
| F10W | AC85 ~ 265v | 10w | 850 Lm | Ra>75 | PF>0.9 | Epistar | 120º |

- Voltaje: 220V
- Color CCT: 6000K / 3000K
- Material: Aleación de Aluminio + Cristal reforzado
- Proyector Reforzado
- Transformador Interior incluido
- 50000 horas

Distribución lumínica



Esquema

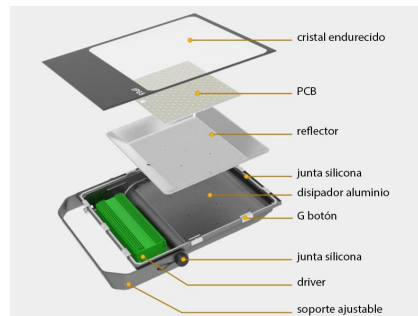

Certificados



RoHS

ErP

